

# BRITISH STANDARD TACTILE FLAG PAVING


**PAS  
2080**


A range of paving designed specifically to meet the department for transport's guidance on the use of tactile paving surfaces.

## FEATURES

- ▶ Hard wearing under typical pedestrian usage
- ▶ Available in a range of colours to suit specific guidelines for specific areas
- ▶ Designed to assist visually impaired pedestrians
- ▶ Provides tactile indication of hazard areas and safe travel routes
- ▶ Available in five surface profiles:
  - ▶ **HAZARD WARNING CORDUROY** - For use in identifying any potential hazard to pedestrians and warning them to proceed with care
  - ▶ **BLISTER** - For use in identifying a crossing place for the visually impaired. Guidelines exist concerning the use, layout and colour of blister paving
  - ▶ **GUIDANCE** - For use in identifying a safe route for pedestrians to travel, avoiding obstacles and hazards
  - ▶ **PLATFORM EDGE WARNING (LOZENGE)** - Used at street level to denote the existence of a platform edge for light transport systems
  - ▶ **CYCLEWAY** - Used at the beginning of a shared pedestrian/ cycle route to denote the path that each should follow
  - ▶ **PLATFORM EDGE WARNING (OFFSET BLISTER)** - Denotes the proximity of a railway platform edge. It can be used on either surface or underground rail systems

## APPLICATIONS

Tactile flag paving is suitable for high volume pedestrian areas, town centres and traffic free zones. For correct choice of flag size to suit your application, refer to BS7533 Part 8.

## MANUFACTURING STANDARD

Tactile flag paving is manufactured using a wet pressed process and is manufactured in accordance with and complies with all relevant sections of BS EN 1339: Precast Concrete Flags – requirements and test methods. Also manufactured to DD CEN/TS 15209.

Aggregate Industries fully operates an accredited Quality Assurance scheme, certified to BS EN 9001:2008 which is independently and regularly assessed by BSI (British Standards Institution). All Charcon manufacturing sites are also certified to BS EN 14001 Environmental Management Systems.

## PERFORMANCE WITH SLIP RESISTANCE

Not applicable.


## COMPLIMENTARY PRODUCTS

Designed for use with British Standard paving and kerb. All developments may require tactile paving to conform to DD CEN/TS 15209.

# CONCRETE KERBS AND EDGING




Grey




Buff




Red

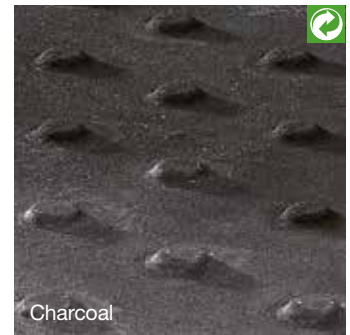


Charcoal




Hazard warning paving



Blister paving




Guidance paving



Platform edge warning (offset blister)



Platform edge warning (lozenge)



Cycleway paving

Flag Product Data					
Size (mm)	450x450	450x450*	400x400	400x400*	400x400
Thickness (mm)	50	70	50	65	50
Weight (kg)	24.7	37.1	18.8	24.7	18.8
Units/m <sup>2</sup>	4.94	4.94	6.25	6.25	6.25
Units/pack	34	28	34	30	34
m <sup>2</sup> /Pack	6.88	5.67	5.44	4.8	5.44
Weight Pack (T)	0.84	1.04	0.64	0.74	0.64
Shade	Grey, Buff, Red, Charcoal	Grey, Buff, Red, Charcoal	Grey, Buff, Red, Charcoal	Grey, Buff, Red, Charcoal	Grey, Buff, Red, Charcoal
Surface Finish	Blister	Blister	Blister	Blister	Hazard
Edge Detail	Square	square	square	square	square

Flag Product Data				
Size (mm)	400x400	400x400	400x400	400x400
Thickness (mm)	50	50	50	50
Weight (kg)	18.8	18.8	18.8	18.8
Units/m <sup>2</sup>	6.25	6.25	6.25	6.25
Units/pack	34	34	34	34
m <sup>2</sup> /Pack	5.44	5.44	5.44	5.44
Weight Pack (T)	0.64	0.64	0.64	0.64
Shade	Grey, Buff, Red, Charcoal	Grey, Buff, Red, Charcoal	Grey, Buff, Red, Charcoal	Grey, Buff, Red, Charcoal
Surface Finish	"Platform Edge Warning	0.45/0.90	0.55	0.62
Edge Detail		Grey	Grey	Grey

Please check availability from different works.

Other shades may be available on a MTO basis. Please check with sales office.

\*Only suitable for product thicknesses of 65mm and 70mm.

## SUSTAINABILITY AND LOCAL SOURCING

### ENERGY USE AND GREENHOUSE GAS EMISSIONS:

Aggregate Industries is at the forefront of sustainability and has committed to reducing both energy and greenhouse gas intensity 5% year-on-year (18.5% total improvement by 2020).

**RECYCLABLE:** 100% of the product can be recycled thus reducing the amount of material that is sent to landfill.

**MANUFACTURING LOCATION:** Produced in the UK, with locally sourced materials under strict environmental and social legislation, for local supply.

**RESPONSIBLE SOURCING:** Aggregate Industries is the first company in the world to achieve accreditation to the BES 6001 Framework Standard for the Responsible Sourcing of Construction Products.

Aggregate Industries has achieved a 'Very Good' rating for major product groups. The BES 6001 standard assesses:

- ▶ Quality management
- ▶ Environmental management
- ▶ Health and safety management
- ▶ Greenhouse gas emissions
- ▶ Minimising raw material usage
- ▶ Labour practice
- ▶ Biodiversity
- ▶ Community engagement

## KEY AGGREGATE AND RECYCLED CONTENT

British Standard flag paving is manufactured using local aggregates. It is made in a wet pressed process in special moulds incorporating pre-formed profiles.

## EFFLORESCENCE

Aggregate Industries cannot accept responsibility for the effect of "efflorescence" which can be a characteristic of all building products with a high cement content. The phenomenon may be exhibited by an apparent loss of intensity of colour and the appearance of a milky white bloom on the face of the product. The effect generally disappears with time and is no way detrimental to the performance of the product.

## GENERIC GREEN GUIDE RATING\*

Concrete paving flags (60mm with a prepared recycled sub-base) - **A+ rated.**

Concrete paving flags (60mm with a prepared sub-base) - **A rated.**

## POLICIES

Aggregate Industries' policies on the environment and community, health and safety and sustainable solutions for different product applications can be viewed on our website [www.aggregate.com](http://www.aggregate.com)

## DESIGN AND INSTALLATION STANDARD

For pavement design guidance refer to BS 7533 Parts 8. For successful installation refer to BS 7533 Part 4. For specific design, installation and maintenance guidance, please contact our technical department on 01335 372222.

## MAINTENANCE AND CLEANING

Aggregate Industries can supply on request advice on specific stain removal and general maintenance, suitable cleaning products and referrals to specialist cleaning companies.

## COSHH DATA

Full COSHH data is available on request. Please call technical services on 01335 372222.

## TECHNICAL SUPPORT

Detailed guidance and assistance with the preparation of specification of the Charcon range of hard landscaping products, including model clauses, is available through the sales office. A free technical design service is also available.

**For further information, please refer to our technical services On 01335 372222.**

\*Ratings based upon generic green guide values (2009) supplied by BRE Global Ltd, [www.thegreenguide.co.uk](http://www.thegreenguide.co.uk)

The information contained within this publication was accurate at time of production. However, Aggregate Industries reserves the right to introduce modifications or changes to detail at any time without notice. No charge is levied for this publication or advice therein, and accordingly the company, its employees and authorised agents can accept no liability whatsoever, either indirectly or directly arising from the use of its products.

### Charcon

Aggregate Industries, Hulland Ward,  
Ashbourne, Derbyshire DE6 3ET

Tel: +44 (0) 1335 372 222

Fax: +44 (0) 1335 370 074

Email: [landscaping@aggregate.com](mailto:landscaping@aggregate.com)

Web: [www.charcon.com](http://www.charcon.com)